

E-Series 12-Bay U.2 Enclosures

**OGT-EU12P-01, OGT-EU12P-02, OGT-EU12S-12,
OGT-EU12M-01, OGT-EU12M-02**

The E-Series 12-Bay U.2 Enclosures provide a simple, flexible way to test several mixed-protocol SSDs. When connected to an OakGate expandable desktop or 3U rackmount appliance, the 12-bay enclosure allows up to twelve devices under test (DUTs). Depending on the type of 12-bay enclosure, the DUTs include single or dual-port NVMe, SAS, and SATA SSDs that use a U.2/SFF-8639 connector.

The OakGate Enduro controller application and Storage Validation Framework Pro (SVF Pro) software, supplied with the appliance, can exercise each SSD individually, as well as provide built-in power cycling and power measurement capabilities.

The front panel of the 12-Bay U.2 Enclosure, provides access to the slots and LEDs (activity and power) for the DUTs. The back panel of the enclosure contains the appliance cable connections for the NVMe/SAS/SATA DUTs, as well as the ON/OFF switch and power connector.

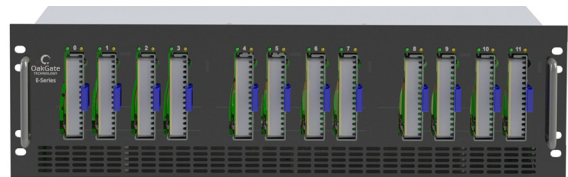


Figure 1. Front View of the 12-Bay U.2 Enclosure

FEATURES

- Supports all major storage protocols including: NVMe, NVMe-MI (standard and basic), SAS, SATA, and AHCI
- Supports single/dual-port NVMe, single/dual-port 12G SAS, and single-port 6G SATA SSDs that use a U.2/SFF-8639 connector
- Ability to run unique tests on each device individually and concurrently
- Individual power cycling and power measurement under software control:
 - Configurable to support 3.3V, 5V, and 12V
 - Ability to turn power on/off to each port/device
 - Ability to measure voltage and current for each port/device (at a sample rate of approximately one read per second)
 - Ability to measure power under various low power states (at a sample rate of approximately one read per second)
- LED indicators: power (green) and activity (amber) on front of enclosure
- Simple, tool-less device replacement
- Rack-mountable using the included rack-rail kit

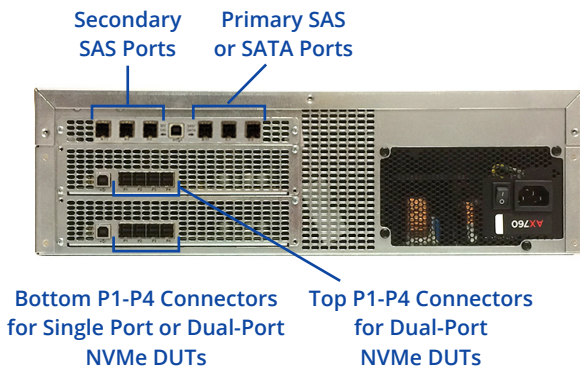


Figure 2. Back View of the 12-Bay U.2 Enclosure

SPECIFICATIONS

| ENCLOSURE DIMENSIONS | |
|----------------------|------------------------------|
| Chassis Dimensions: | 17.5" W × 5.25" (3U) × 20" D |
| POWER SPECIFICATIONS | |
| Power supply: | 760W |
| Maximum drive power: | 40W per drive |

12-BAY U.2 ENCLOSURE TYPES

| 12-Bay Single-Port NVMe U.2 Enclosure (OGT-EU12P-01) | 12-Bay Dual-Port NVMe U.2 Enclosure (OGT-EU12P-02) | 12-Bay SAS/SATA U.2 Enclosure (OGT-EU12S-01) | 12-Bay Multi-Protocol, Single-Port NVMe U.2 Enclosure (OGT-EU12M-01) | 12-Bay Multi-Protocol, Dual-Port NVMe U.2 Enclosure (OGT-EU12M-02) |
|--|--|--|--|---|
| Accommodates up to 12 single-port NVMe SSDs | Accommodates up to 12 dual-port NVMe SSDs | Accommodates up to 12 single/dual-port 12G SAS and single-port 6G SATA SSDs | Accommodates up to 12 single-port NVMe, single/dual-port 12G SAS, and single-port 6G SATA SSDs | Accommodates up to 12 dual-port NVMe, single/dual-port 12G SAS, and single-port 6G SATA SSDs |
| Supported with an expandable desktop or 3U rackmount appliance. | Supported with a 3U rackmount appliance only. | Supported with an expandable desktop or 3U rackmount appliance. | Supported with an expandable desktop or 3U rackmount appliance. | Supported with a 3U rackmount appliance only. |
| Includes: <ul style="list-style-type: none"> • 12-bay U.2 enclosure • 12 device carriers • USB cable • Power cord • NVMe x16 host card (installed in appliance) • iPass/SFF-8644 (x4) cable • Rack-rail kit • One-year hardware/software support | Includes: <ul style="list-style-type: none"> • 12-bay U.2 enclosure • 12 device carriers • USB cable • Power cord • Two NVMe x16 host cards (installed in appliance) • Two iPass/SFF-8644 (x4) cables • Rack-rail kit • One-year hardware/software support | Includes: <ul style="list-style-type: none"> • 12-bay U.2 enclosure • 12 device carriers • USB cable • Power cord • Three SAS/SATA HBAs (installed in appliance) • Six external HD mini-SAS SFF-8644 cables • Rack-rail kit • One-year hardware/software support | Includes: <ul style="list-style-type: none"> • 12-bay U.2 enclosure • 12 device carriers • USB cable • Power cord • NVMe x16 host card (installed in appliance) • iPass/SFF-8644 (x4) cable • Three SAS/SATA HBAs (installed in appliance) • Six external HD mini-SAS SFF-8644 cables • Rack-rail kit • One-year hardware/software support | Includes: <ul style="list-style-type: none"> • 12-bay U.2 enclosure • 12 device carriers • USB cable • Power cord • Two NVMe x16 host cards (installed in appliance) • Two iPass/SFF-8644 (x4) cable • Three SAS/SATA HBAs (installed in appliance) • Six external HD mini-SAS SFF-8644 cables • Rack-rail kit • One-year hardware/software support |

ORDERING INFORMATION

| PRODUCT DESCRIPTION | MODEL NUMBER |
|--|--------------|
| E-SERIES 12-BAY U.2 ENCLOSURES | |
| 12-Bay Single-Port NVMe U.2 Enclosure | OGT-EU12P-01 |
| 12-Bay Dual-Port NVMe U.2 Enclosure | OGT-EU12P-02 |
| 12-Bay SAS/SATA U.2 Enclosure | OGT-EU12S-01 |
| 12-Bay Multi-Protocol, Single-Port NVMe U.2 Enclosure | OGT-EU12M-01 |
| 12-Bay Multi-Protocol, Dual-Port NVMe U.2 Enclosure | OGT-EU12M-02 |
| COMPATIBLE D-SERIES and R-SERIES APPLIANCES | |
| Expandable Desktop Appliance (not applicable for 12-bay dual-port NVMe U.2 enclosures) | OGT-DE100 |
| 3U Rackmount Appliance | OGT-R300 |
| COMPATIBLE A-SERIES ADD-ONS | |
| PCIe Power Interposer Card for some appliances and enclosures | OGT-AP100 |

Copyright © August 1, 2018 OakGate Technology. All rights reserved worldwide. Although this information is believed to be accurate and reliable at the time of publication, OakGate Technology assumes no responsibility for errors or omissions. OakGate Technology reserves the right to make changes or corrections without notice. This document is the property of OakGate Technology and may not be duplicated without permission from OakGate Technology.